
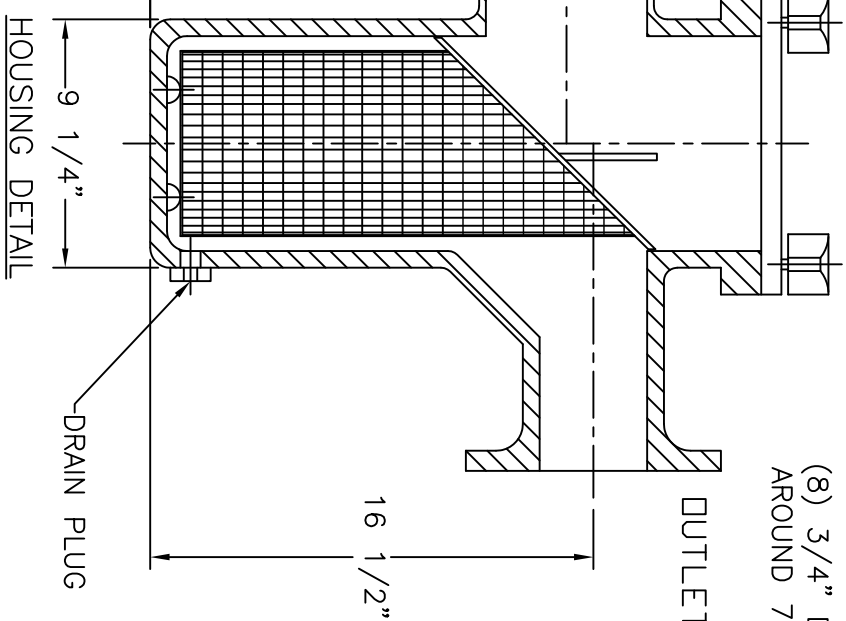
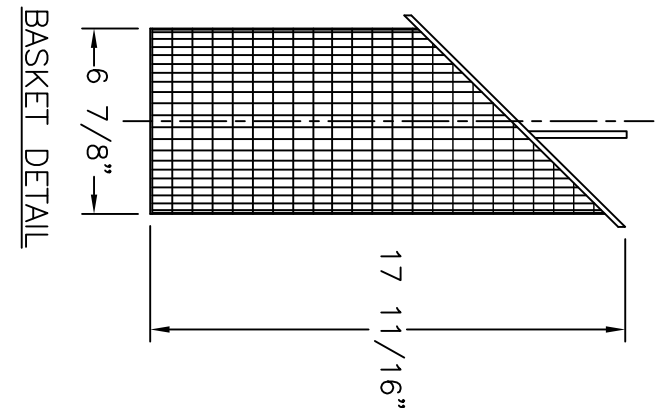
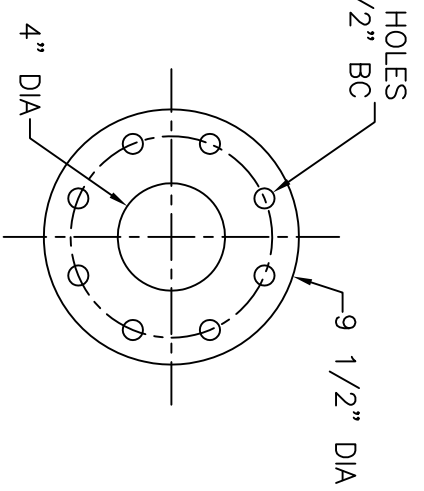
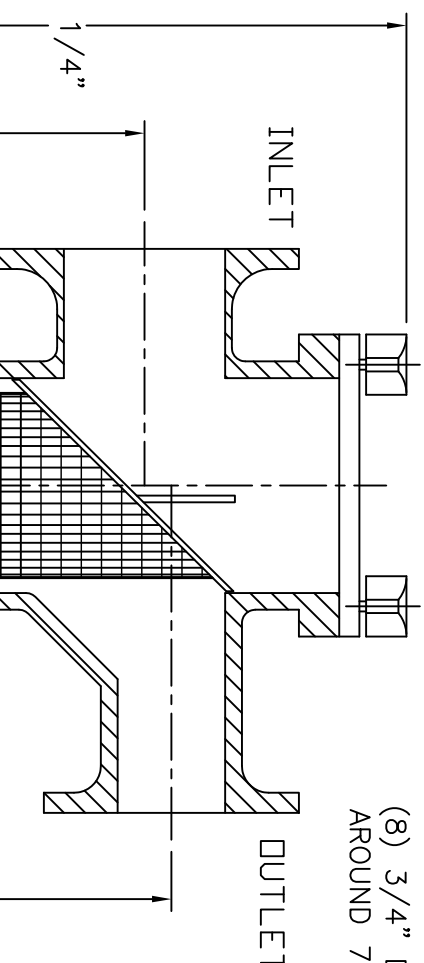
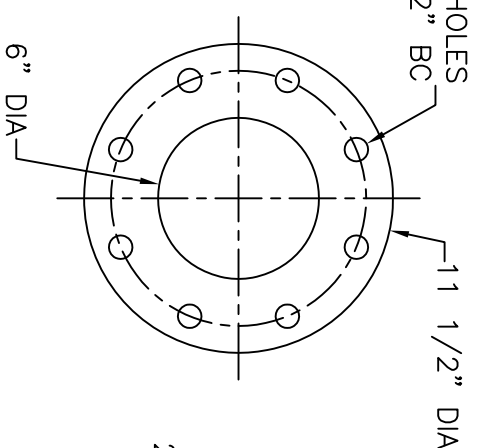
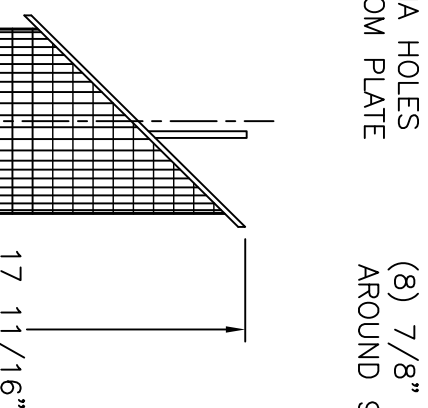
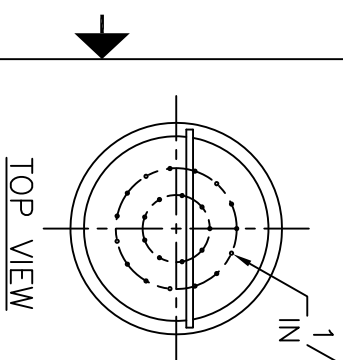


## NOTES

1. STRAINER BODY: FIBERGLASS CONSTRUCTION USING ISOPHTHALIC POLYESTER RESIN AND A .100" THK. CORROSION LINER USING ONE LAYER C GLASS AND TWO LAYERS CHOPPED STRAND MAT.
2. LID: CLEAR ACRYLIC
3. TOGGLE BOLTS: STAINLESS STEEL
4. HAND KNOBS: ABS WITH BRASS INSERTS
5. O-RING: ETHYLENE PROPYLENE
6. BASKET: 316 STAINLESS STEEL WEDGE WIRE, 3/16" SQUARE OPENING

—INLET AND OUTLET FLANGES SHALL HAVE 150#  
ANSI STANDARD DRILL PATTERNS

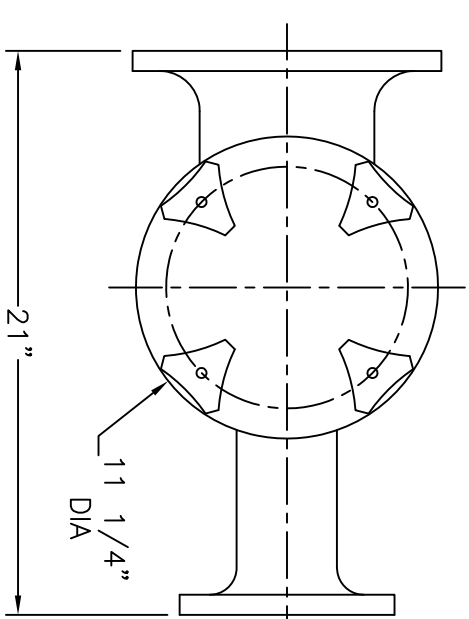

CERTIFIED FOR PRODUCTION									
TOLERANCES UNLESS OTHERWISE SPECIFIED									
MACHINED DIMENSIONS:									
X.X ± .020 FINISH: 125/									
X.XX ± .010 ANGLES: ± 2°									
X.XXX ± .005 RADII: ± .03									
FRACTIONAL DIMENSIONS:									
1/X ± 1/8									
REMOVE ALL BURRS AND BREAK ALL SHARP EDGES: .016 x 45°									
REV	DESCRIPTION				DATE				
6" x 4" T-STYLE ECCENTRIC REDUCING BASKET STRAINER									
MERSMADE® PO BOX 306 DENMARK, SC 29042 P:803-793-4263 F:803-793-4265									
SIZE		DWN BY: SJV		DWG NO.		REV			
B		CHK BY:		M-0165		R0			
SCALE: NTS		DATE: 04/19/18		Sheet: 1 OF 1					