
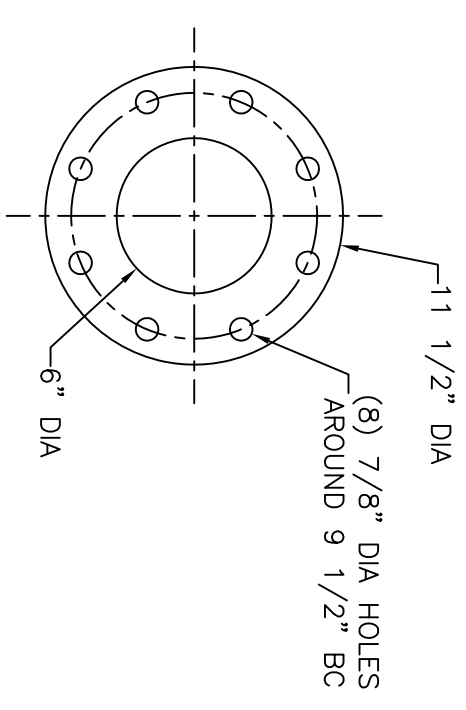
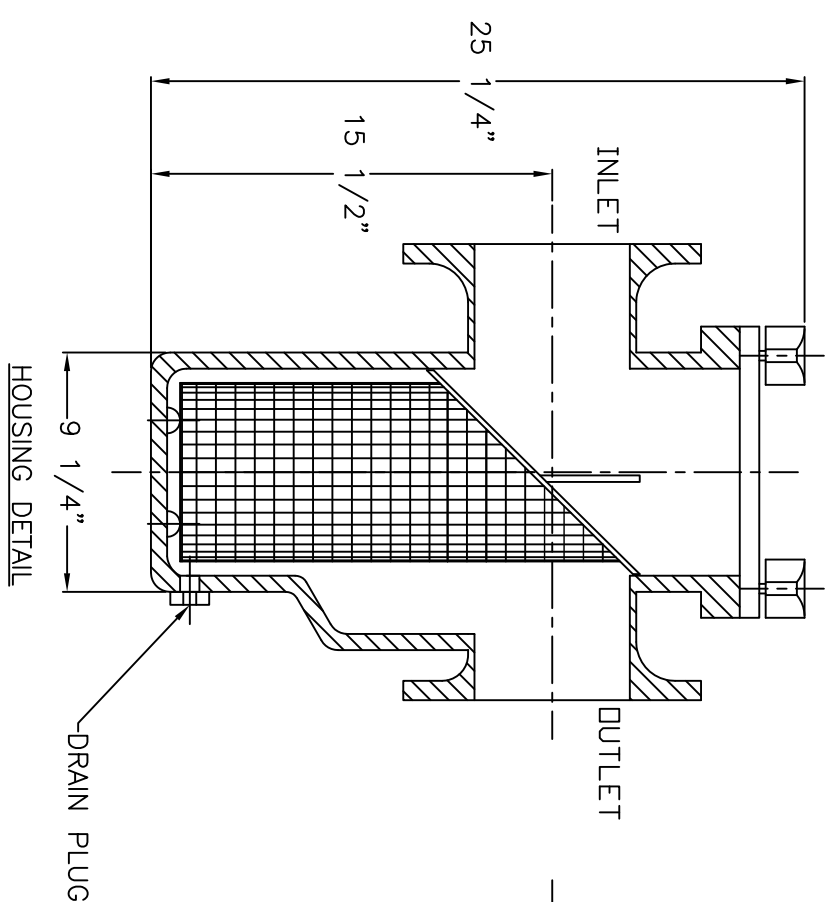
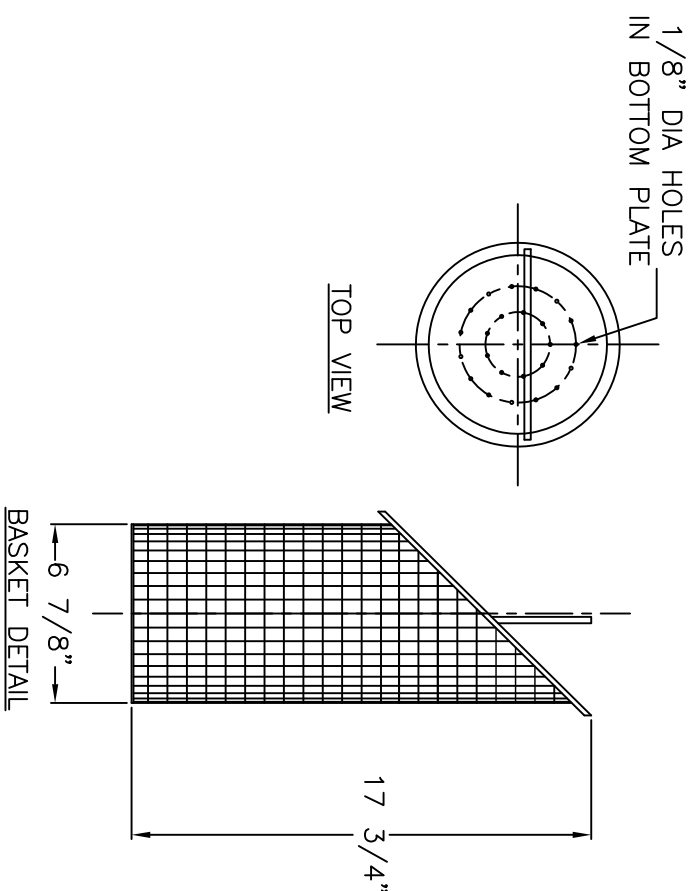


NOTES

1. STRAINER BODY: FIBERGLASS CONSTRUCTION USING ISOPHTHALIC POLYESTER RESIN, ASHLAND AROPOL 7341T-15 AND A .100" THK. CORROSION LINER USING ONE LAYER C GLASS AND TWO LAYERS CHOPPED STRAND MAT.
2. LID: CLEAR ACRYLIC
3. TOGGLE BOLTS: STAINLESS STEEL
4. HAND KNOBS: ABS WITH STAINLESS STEEL INSERTS
5. O-RING: ETHYLENE PROPYLENE
6. BASKET: 316 STAINLESS STEEL WEDGE WIRE, 3/16" SQ. OPENING

-INLET AND OUTLET FLANGES SHALL HAVE 150# ANSI STANDARD DRILL PATTERNS

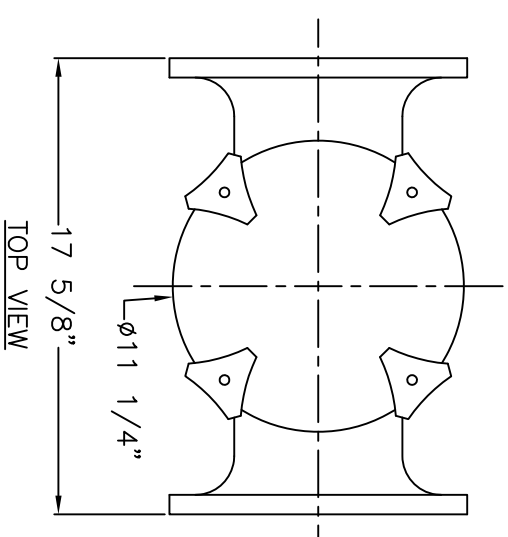

CERTIFIED FOR PRODUCTION									
TOLERANCES UNLESS OTHERWISE SPECIFIED									
MACHINED DIMENSIONS:									
X.X		±.020		FINISH: $\frac{125}{\sqrt{2}}$					
X.XX		±.010		ANGLES: $\frac{3}{2}$					
X.XXX		±.005		RADII: $\frac{1}{2}$					
FRACTIONAL DIMENSIONS:									
1/X		± 1/8							
REMOVE ALL BURRS AND BREAK ALL SHARP EDGES: .016 x 45°									
REV		DESCRIPTION							
DATE									
6" FO SERIES STRAINER									
SIZE		DWN BY: S.V		DWG NO.		REV			
B		CHK BY:		M-0095		RO			
SCALE: NTS		DATE: 11/14/17		Sheet: 1		OF		1	
MER-MADE						PO BOX 306 DENMARK, SC 29042 P:803-793-4263 F:803-793-4265			