
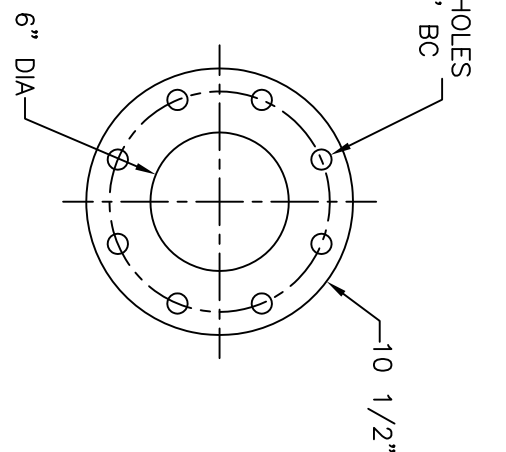
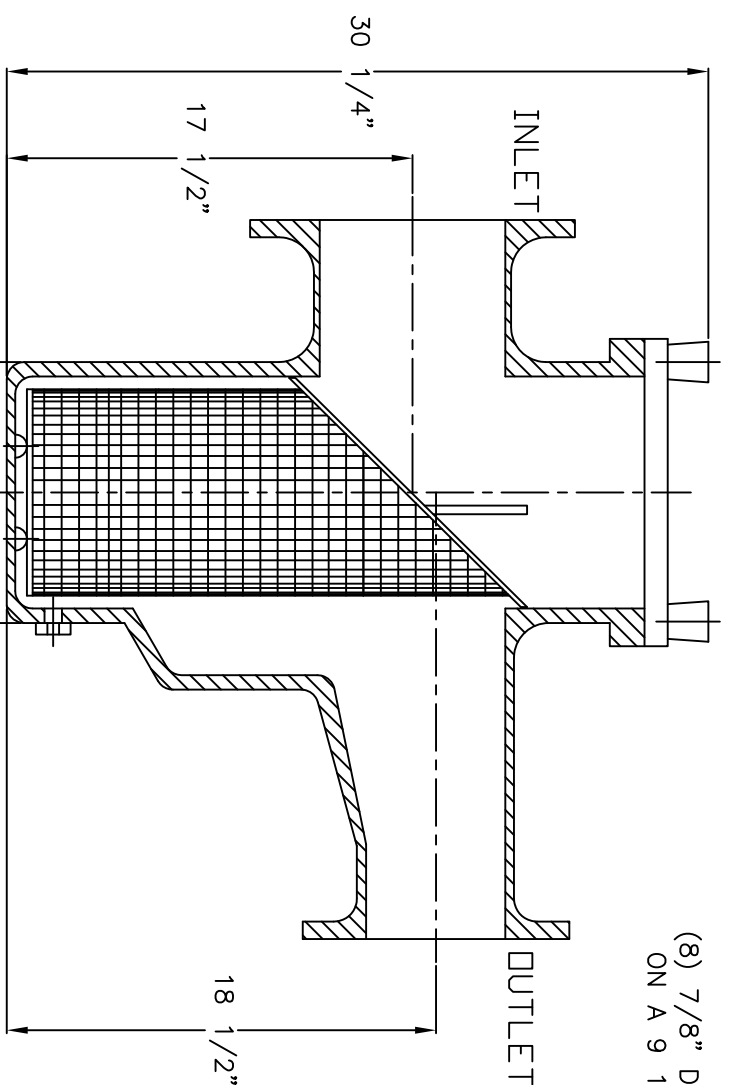
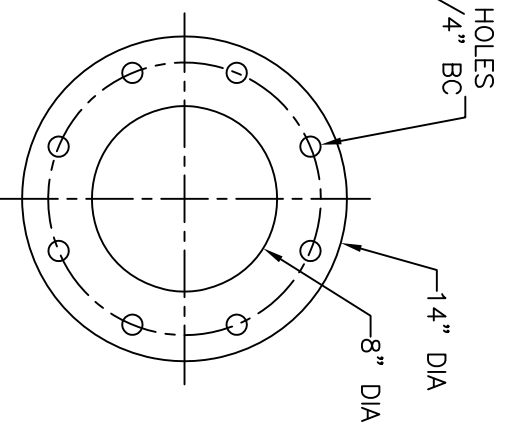
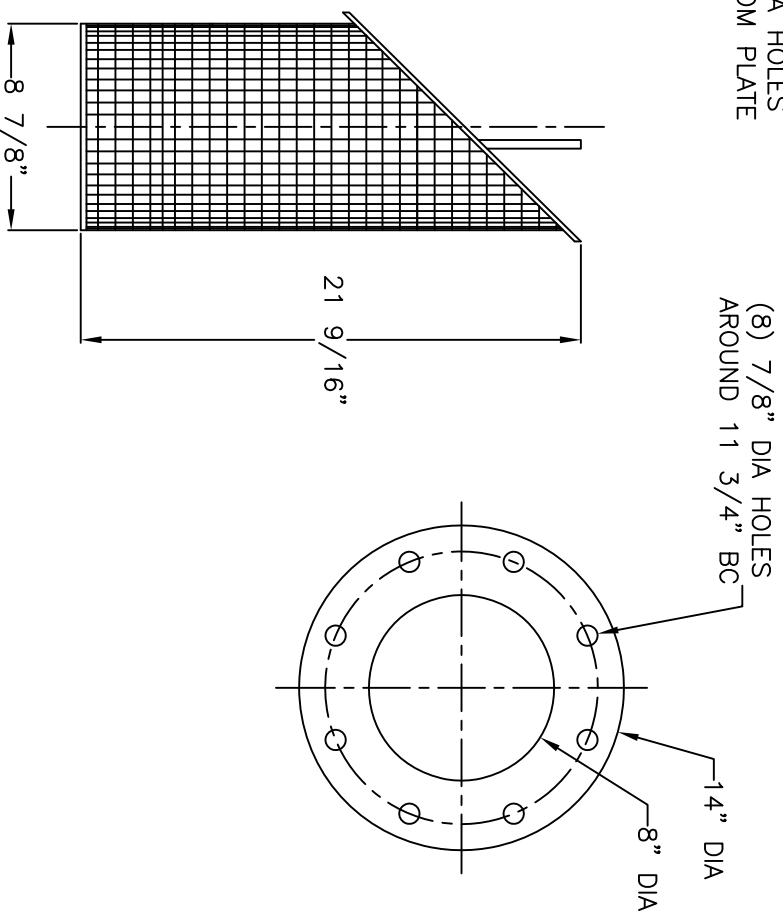


NOTES

1. STRAINER BODY: FIBERGLASS CONSTRUCTION USING ISOPHTHALIC POLYESTER RESIN AND A .100" THK. CORROSION LINER USING ONE LAYER C GLASS AND TWO LAYERS CHOPPED STRAND MAT.
2. LID: CLEAR ACRYLIC
3. TOGGLE BOLTS: STAINLESS STEEL
4. HAND KNOBS: ABS WITH BRASS INSERTS
5. O-RING: ETHYLENE PROPYLENE
6. BASKET: 316 STAINLESS STEEL WEDGE WIRE, 3/16" SQ. OPENING

INLET AND OUTLET FLANGES SHALL HAVE 150#
ANSI STANDARD DRILL PATTERNS

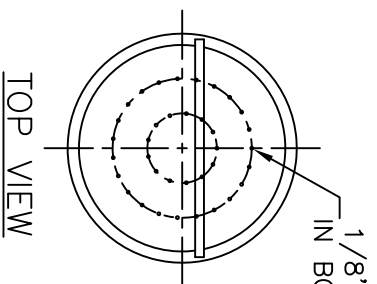

CERTIFIED FOR PRODUCTION		TOLERANCES UNLESS OTHERWISE SPECIFIED							
BY: _____ DATE: _____		MACHINED DIMENSIONS:							
MER-MADE, INC.		X.X ± .020 FINISH: 125/							
		X.XX ± .010 ANGLES: ± 2							
		X.XXX ± .005 RADII: ± .03							
		FRACTIONAL DIMENSIONS:							
		1/X ± 1/8							
		REMOVE ALL BURRS AND BREAK ALL SHARP EDGES: .016 x 45°							
		REV							
		DESCRIPTION							
		DATE							
SCALE: NTS		DATE: 12/11/17		Sheet: 1		OF 1			
SIZE		DWN BY: SJV		DWG NO.		REV			
B		CHK BY:		M-0119		RO			
8" X 6" FO SERIES ECCENTRIC REDUCING BASKET STRAINER									
MER-MADE				PO BOX 306 DENMARK, SC 29042 P:803-793-4263 F:803-793-4265					