
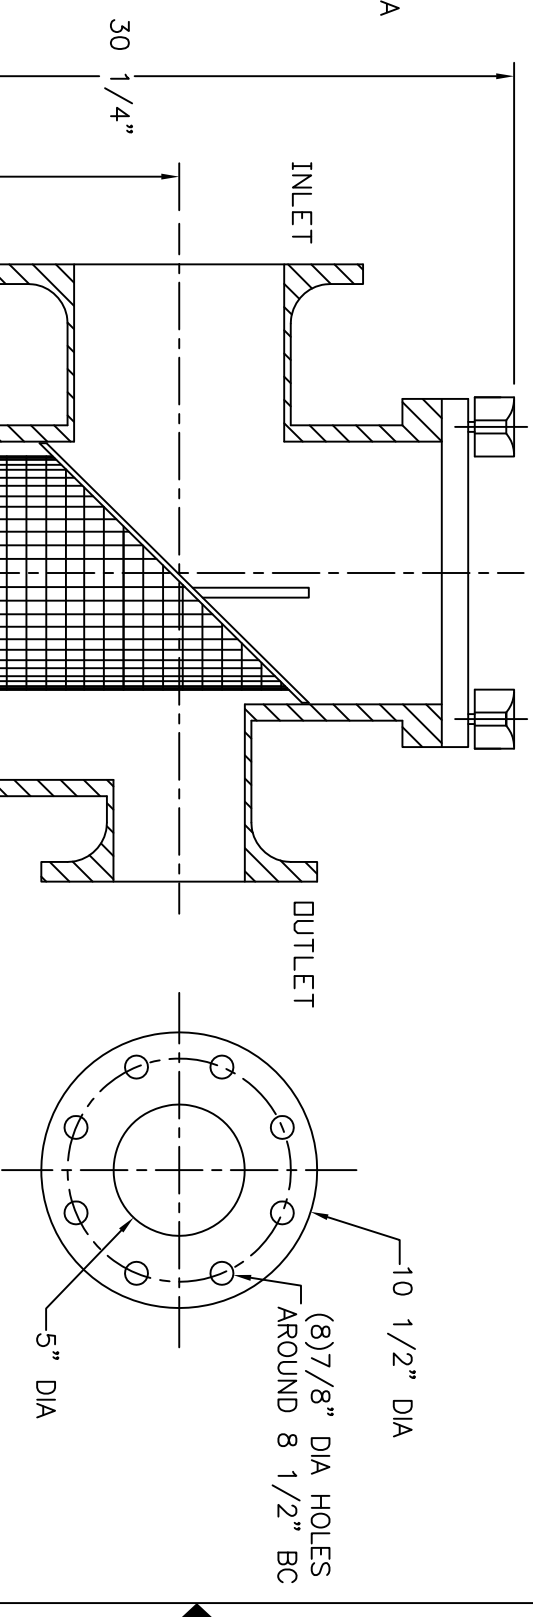
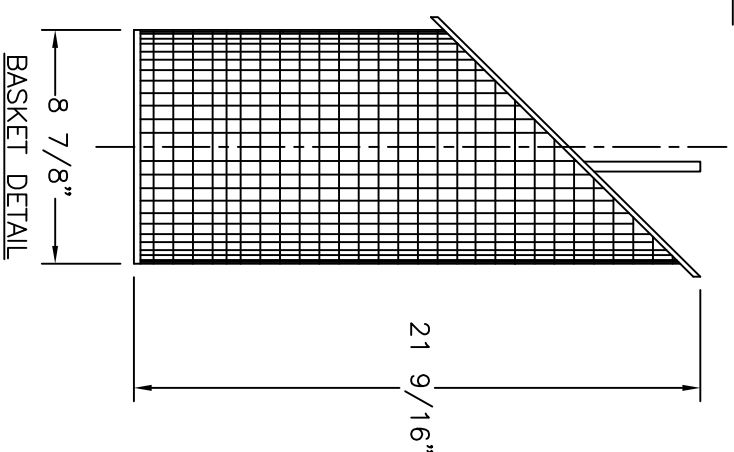
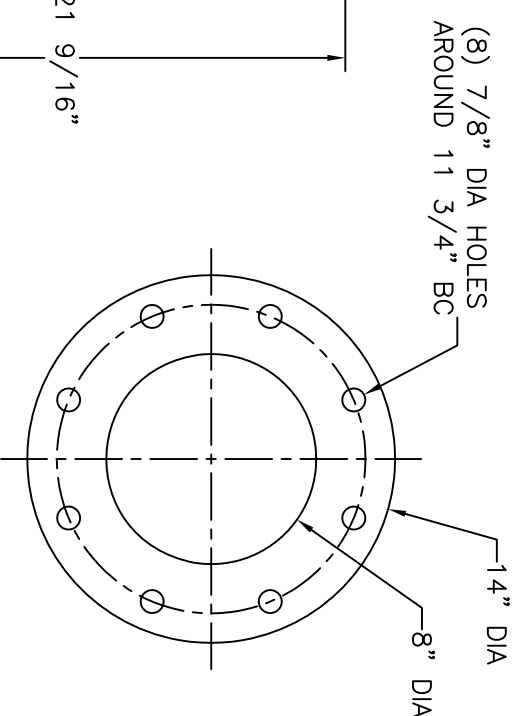
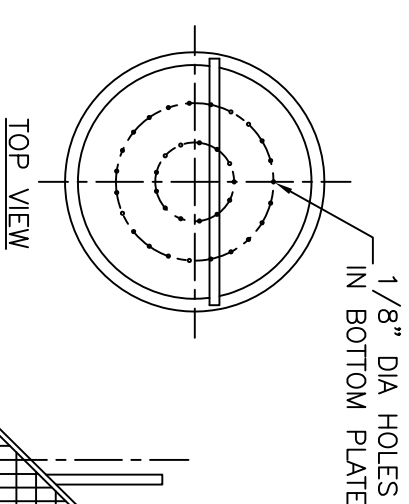


NOTES

1. STRAINER BODY: FIBERGLASS CONSTRUCTION USING ISOPHTHALIC POLYESTER RESIN AND A .100" THK. CORROSION LINER USING ONE LAYER C GLASS AND TWO LAYERS CHOPPED STRAND MAT.
2. LID: CLEAR ACRYLIC
3. TOGGLE BOLTS: STAINLESS STEEL
4. HAND KNOBS: ABS WITH BRASS INSERTS
5. O-RING: ETHYLENE PROPYLENE
6. BASKET: 316 STAINLESS STEEL WEDGE WIRE, 3/16" SQ. OPENING

-INLET AND OUTLET FLANGES SHALL HAVE 150#
ANSI STANDARD DRILL PATTERNS

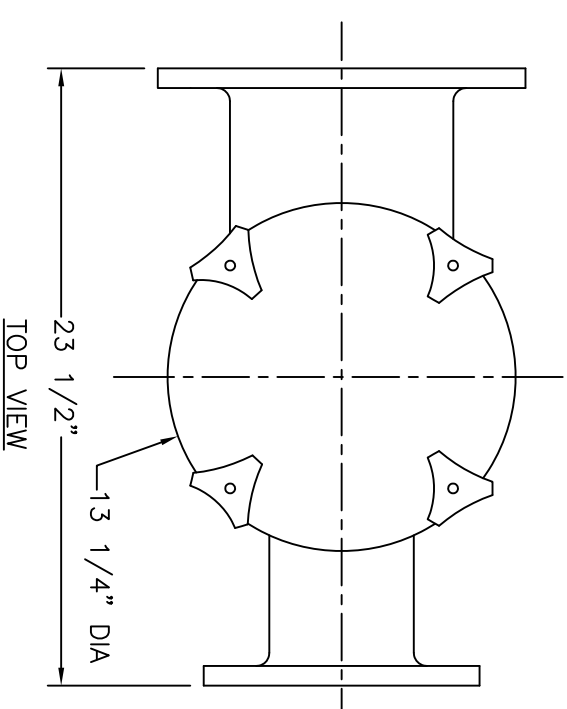

CERTIFIED FOR PRODUCTION									
TOLERANCES UNLESS OTHERWISE SPECIFIED									
MACHINED DIMENSIONS:									
X.X		± .020		FINISH: 125/					
X.XX		± .010		ANGLES: ± 2					
X.XXX		± .005		RADI: ± .03					
FRACTIONAL DIMENSIONS:									
1/X		± 1/8							
REMOVE ALL BURRS AND BREAK ALL SHARP EDGES: .016 x 45°									
REV		DESCRIPTION							
DATE									
SCALE: NTS		DATE: 3/23/18		Sheet: 1		OF 1			
SIZE		DWN BY: WGM		DWG NO.		REV			
B		CHK BY:		M-0138		RO			
8" X 5" STANDARD REDUCING FO SERIES BASKET STRAINER									
MER-MADE						PO BOX 306 DENMARK, SC 29042 P:803-793-4263 F:803-793-4265			
THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO MER-MADE FILTER. IT IS THE PROPERTY OF MER-MADE FILTER AND IS TO BE RETURNED UPON REQUEST. THIS DRAWING AND SUCH INFORMATION IS NOT TO BE REPRODUCED, TRANSMITTED, DISCLOSED, OR USED OTHERWISE IN WHOLE OR IN PART WITHOUT THE WRITTEN AUTHORIZATION OF MER-MADE FILTER INCORPORATED.									
BY: _____ DATE: _____									
MER-MADE, INC.									