
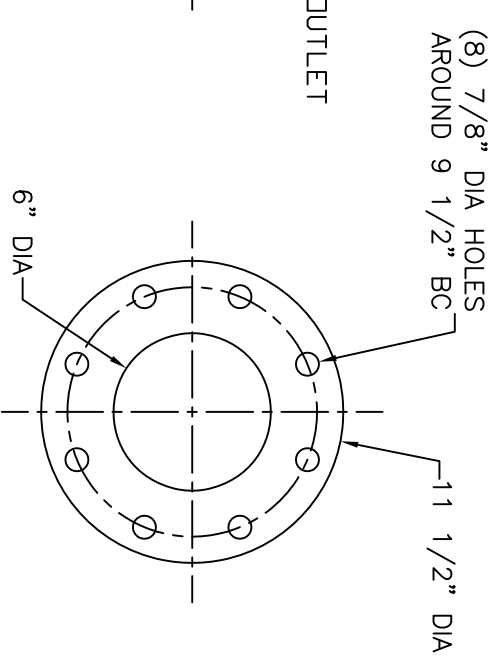
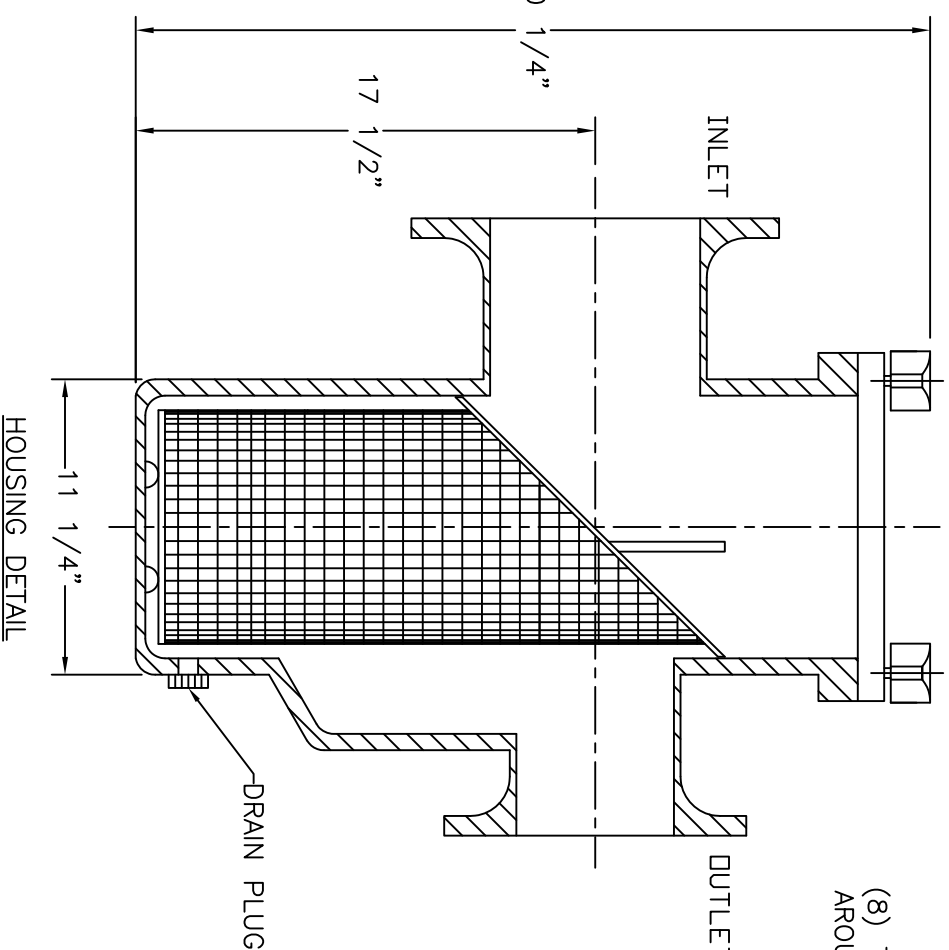
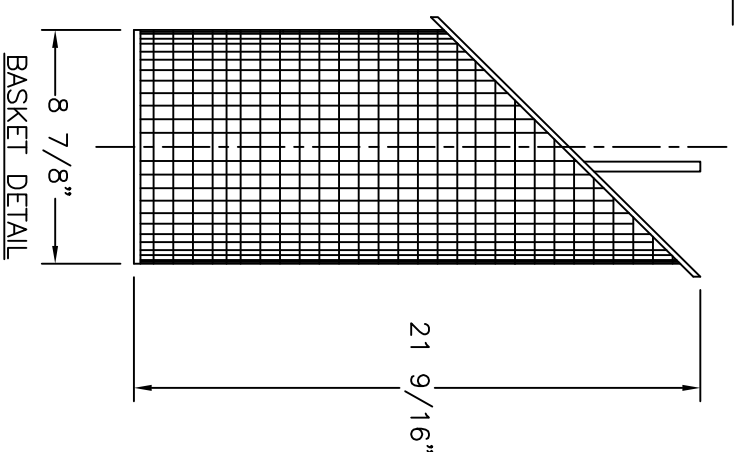
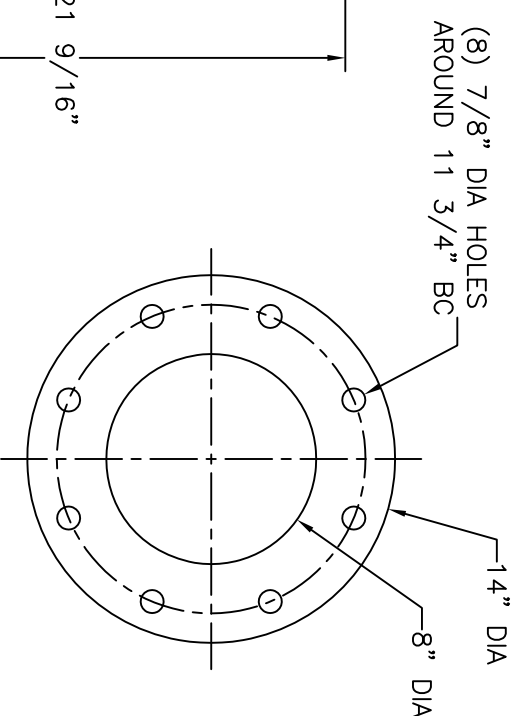
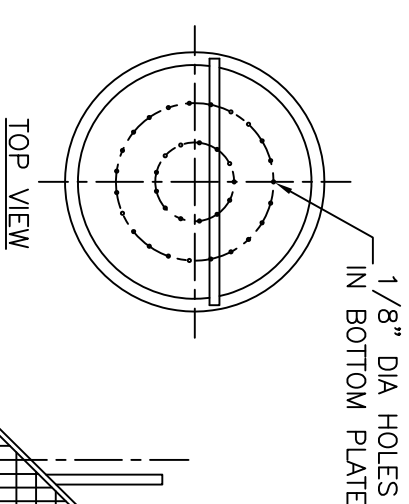


NOTES

1. STRAINER BODY: FIBERGLASS CONSTRUCTION USING ISOPHTHALIC POLYESTER RESIN AND A .100" THK. CORROSION LINER USING ONE LAYER C GLASS AND TWO LAYERS CHOPPED STRAND MAT.
2. LID: CLEAR ACRYLIC
3. TOGGLE BOLTS: STAINLESS STEEL
4. HAND KNOBS: ABS WITH BRASS INSERTS
5. O-RING: ETHYLENE PROPYLENE
6. BASKET: 316 STAINLESS STEEL WEDGE WIRE, 3/16" SQ. OPENING

-INLET AND OUTLET FLANGES SHALL HAVE 150#
ANSI STANDARD DRILL PATTERNS

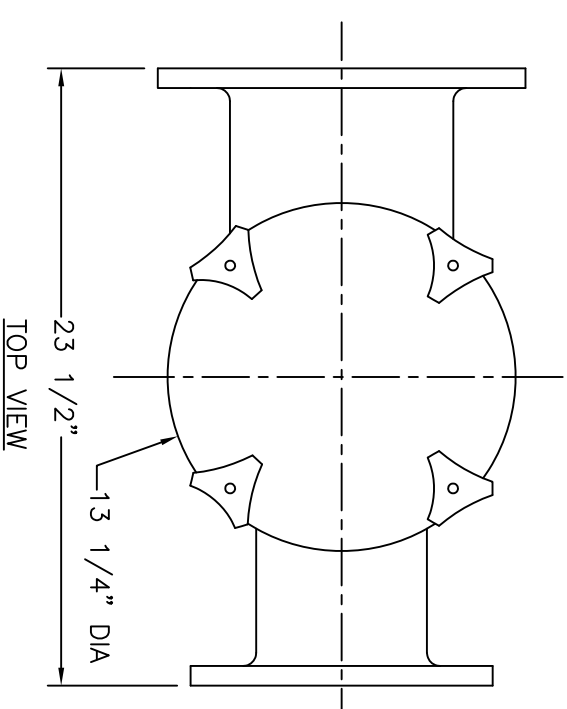

CERTIFIED FOR PRODUCTION									
TOLERANCES UNLESS OTHERWISE SPECIFIED									
MACHINED DIMENSIONS:									
X.X		± .020		FINISH: $\frac{125}{\sqrt{2}}$					
X.XX		± .010		ANGLES: $\pm .2^\circ$					
X.XXX		± .005		RADII: $\pm .03$					
FRACTIONAL DIMENSIONS:									
1/X		± 1/8							
REMOVE ALL BURRS AND BREAK ALL SHARP EDGES: .016 x 45°									
REV		DESCRIPTION		DATE					
<div><div><div>MER-M-MADE</div><div>PO BOX 306 DENMARK, SC 29042 P:803-793-4263 F:803-793-4264</div></div><div>8" X 6" STANDARD REDUCING FO SERIES BASKET STRAINER</div><div><div>SIZE</div><div><div>DWN BY: WGM</div><div>DWG NO. M-0139</div></div><div><div>B</div><div>CHK BY:</div><div>REV</div></div></div><div>SCALE: NTS DATE: 3/23/18 Sheet: 1 OF 1</div></div>									