

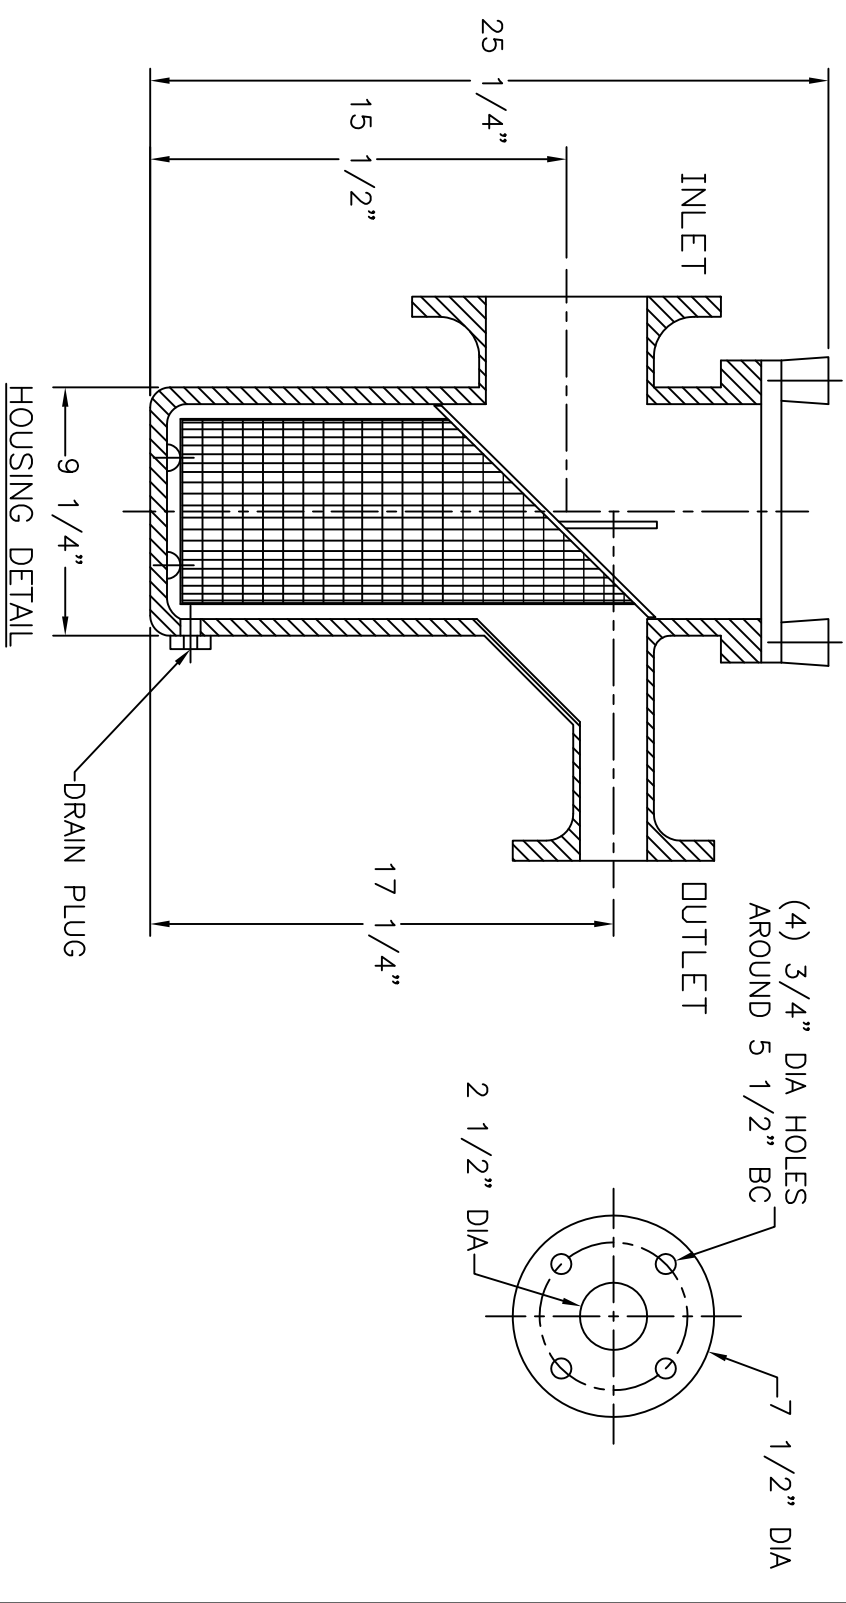
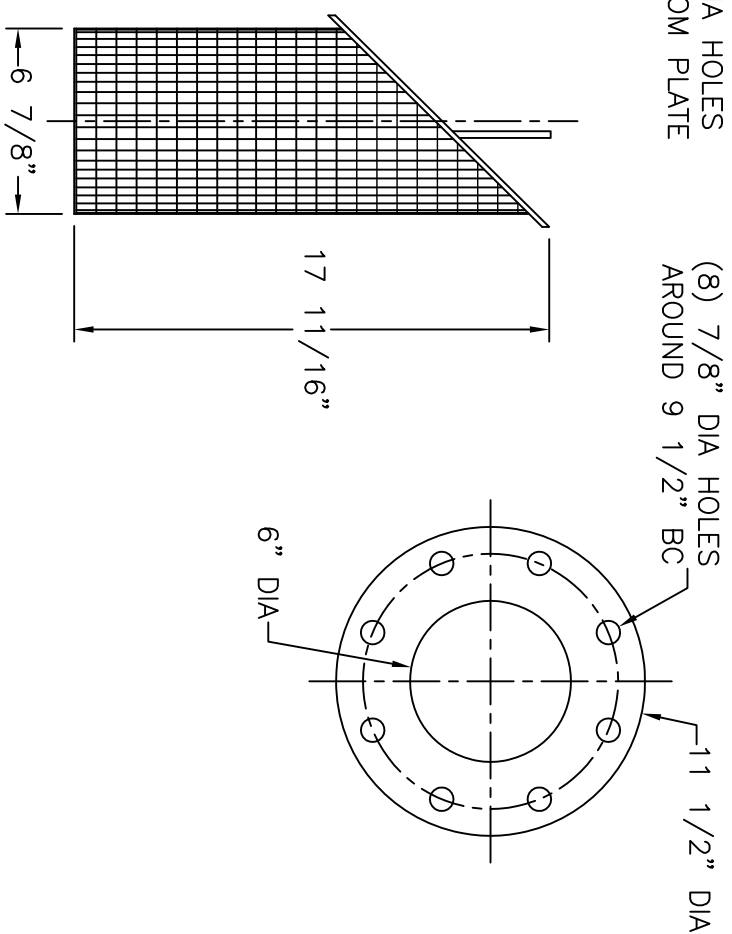
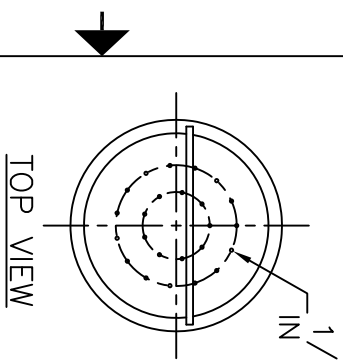


NOTES

1. STRAINER BODY: FIBERGLASS CONSTRUCTION USING ISOPHTHALIC POLYESTER RESIN AND A .100" THK. CORROSION LINER USING ONE LAYER C GLASS AND TWO LAYERS CHOPPED STRAND MAT.
2. LID: CLEAR ACRYLIC
3. TOGGLE BOLTS: STAINLESS STEEL
4. HAND KNOBS: FRP WITH STAINLESS STEEL INSERTS
5. O-RING: ETHYLENE PROPYLENE
6. BASKET: 316 STAINLESS STEEL WEDGE WIRE, 3/16" SQUARE OPENING

—INLET AND OUTLET FLANGES SHALL HAVE 150#
ANSI STANDARD DRILL PATTERNS

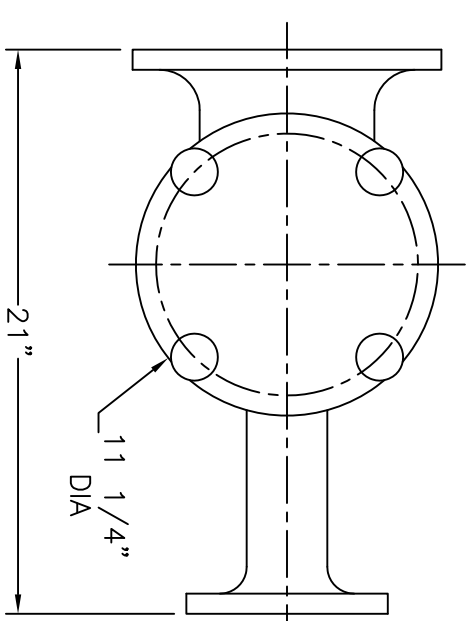

CERTIFIED FOR PRODUCTION									
TOLERANCES UNLESS OTHERWISE SPECIFIED									
MACHINED DIMENSIONS:									
X.X ±.020 FINISH: 125/									
X.XX ±.010 ANGLES: ±.2									
X.XXX ±.005 RADII: ±.03									
FRACTIONAL DIMENSIONS:									
1/X ±1/8									
REMOVE ALL BURRS AND BREAK ALL SHARP EDGES: .016 x 45°									
THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO MER-MADE FILTER CORPORATION AND IS NOT TO BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT THE WRITTEN AUTHORIZATION OF MER-MADE FILTER INCORPORATED.									
BY: _____ DATE: _____									
MER-MADE, INC.									
REV									
DESCRIPTION									
DATE									
SCALE: NTS									
DATE: 04/19/18									
Sheet: 1 OF 1									
SIZE									
DWN BY: SJV									
DWG NO. M-0163									
CHK BY: _____									
REV									
RO									
6" x 2 1/2" T-STYLE ECC.									
REDUCING BASKET STRAINER									
MER-MADE®									
PO BOX 306									
DENMARK, SC 29042									
P:803-793-4263 F:803-793-4265									