
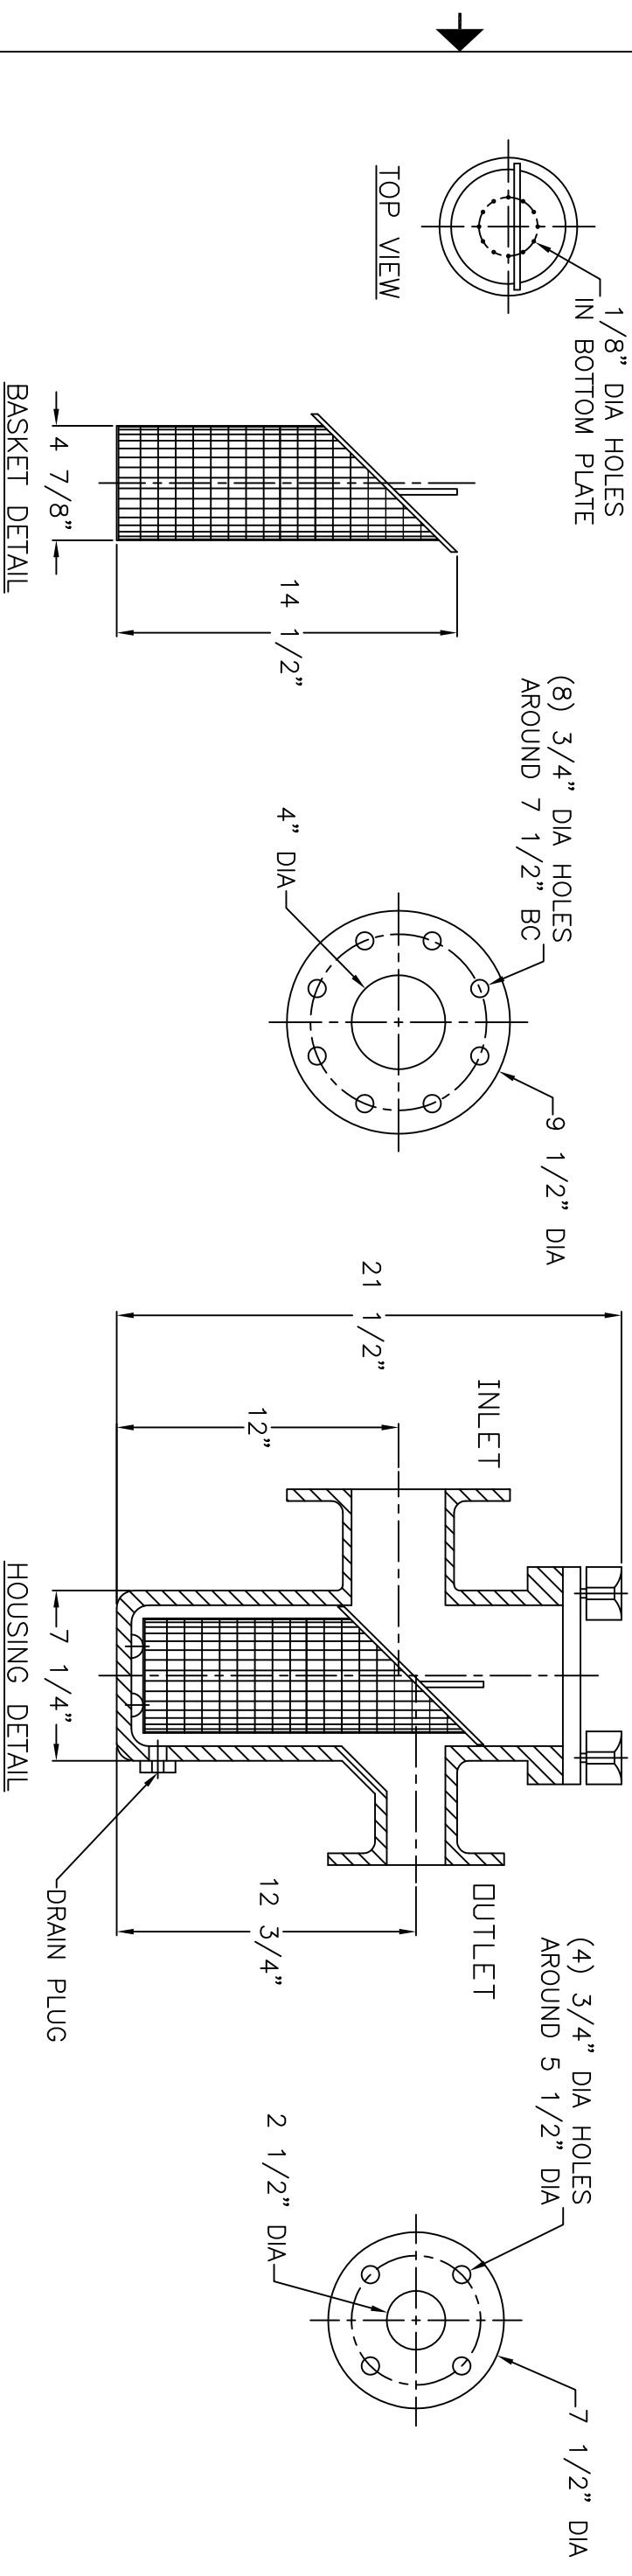


NOTES

1. STRAINER BODY: FIBERGLASS CONSTRUCTION USING ISOPHTHALIC POLYESTER RESIN AND A .100" THK. CORROSION LINER USING ONE LAYER C GLASS AND TWO LAYERS CHOPPED STRAND MAT.
2. LID: CLEAR ACRYLIC
3. TOGGLE BOLTS: STAINLESS STEEL
4. HAND KNOBS: ABS WITH BRASS INSERTS
5. O-RING: ETHYLENE PROPYLENE
6. BASKET: 316 STAINLESS STEEL WEDGE WIRE, 3/16" SQUARE OPENING

—INLET AND OUTLET FLANGES SHALL HAVE 150#
ANSI STANDARD DRILL PATTERNS

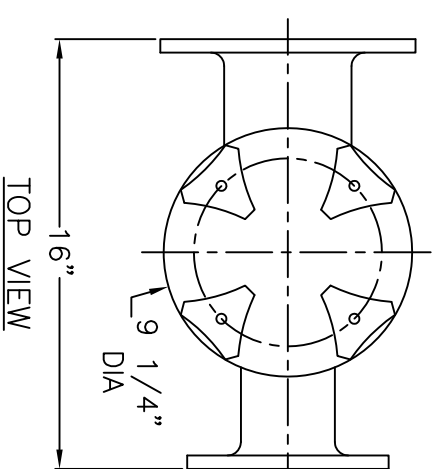

| | | | | | | | | | |
|---|--|--|--|--|--|--|--|--|--|
| CERTIFIED FOR PRODUCTION | | | | | | | | | |
| TOLERANCES UNLESS OTHERWISE SPECIFIED | | | | | | | | | |
| MACHINED DIMENSIONS: | | | | | | | | | |
| X.X ± .020 FINISH: 125/ | | | | | | | | | |
| X.XX ± .010 ANGLES: ± 2 | | | | | | | | | |
| X.XXX ± .005 RADII: ± .03 | | | | | | | | | |
| FRACTIONAL DIMENSIONS: | | | | | | | | | |
| 1/X ± 1/8 | | | | | | | | | |
| REMOVE ALL BURRS AND BREAK ALL SHARP EDGES: .016 x 45° | | | | | | | | | |
| THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO MER-MADE FILTER CORPORATION. IT IS SUBMITTED IN CONFIDENCE AND IS NOT TO BE USED, COPIED, REPRODUCED, OR TRANSMITTED IN ANY MANNER WITHOUT THE WRITTEN AUTHORIZATION OF MER-MADE FILTER CORPORATION. | | | | | | | | | |
| BY: _____ DATE: _____ | | | | | | | | | |
| MER-MADE, INC. | | | | | | | | | |
| 4" x 2 1/2" T-STYLE ECC. | | | | | | | | | |
| REDUCING BASKET STRAINER | | | | | | | | | |
| SIZE DWN BY: S JV DWG NO. M-0161 REV R0 | | | | | | | | | |
| B CHK BY: _____ | | | | | | | | | |
| SCALE: NTS DATE: 04/19/18 Sheet: 1 OF 1 | | | | | | | | | |